

A man with a beard and safety glasses, wearing a plaid shirt and a canvas apron, is working in a workshop. He is using a hand plane to smooth a piece of wood. The background is a warm, orange-toned brick wall.

ONE
FLOOR

EUROPE

THE **EVERYDAY** FLOORING

WORKSHOP 55 CONCEPT





WORKSHOP 55 is a nature-inspired collection, highly textured, comprising many embossed-in-register decors, all available in a dryback finish (Eco55) and in a rigid click acoustic version (Solide Click 55).

With its 0.55mm wear-layer, **WORKSHOP 55 is designed to suit a variety of commercial applications.**

The **collection is made of 30 ultra-realistic decors**, from subtle oaks to burnt woods, from classical concretes to industrial metal designs, corroded and oxidized by time.

For those looking for the aesthetics and **timeless elegance of herringbones or chevrons floors**, a selection of 5 wood colors is also offered in these 2 contemporary formats.

With its 70 references, WORKSHOP 55 LVT CONCEPT always fits!

WORKSHOP 55 CONCEPT

Bring nature's beauty indoor and transform your workplace, shop, hotel or any room of the house into a place where you feel comfortable!



PRODUCTS BENEFITS

2 product structures suitable for residential and commercial uses.

All wood decors embossed-in-register.

A selection of 5 wood colors available in herringbones and in chevrons patterns (ECO55).

Direct installation over most existing hard surface floors. Little or no subfloor preparation required (SOLIDE CLICK 55).

Resistant to scuff, scratches and stains. PUR Ecoprotec™ surface treatment for an easy cleaning.

Integrated acoustic pad for high sound reduction (22 dB – SOLIDE CLICK 55).

Suitable for underfloor heating.

100% waterproof.

Quick and easy to install thanks to the fold-down vertical click system (SOLIDE CLICK 55).

Very low VOC, phthalate free and 100% recyclable.


Can be removed without leaving any residue (SOLIDE CLICK 55).




What is EIR (Embossed in Register) Flooring ?

There are so many flooring options available today that it can be difficult to choose the perfect flooring for home or business. Technological advances have made it possible to have a floor with a beautiful look and feel of natural wood – but better – thanks to a perfect match between the design and the surface texture.

ECO55 (OFD)

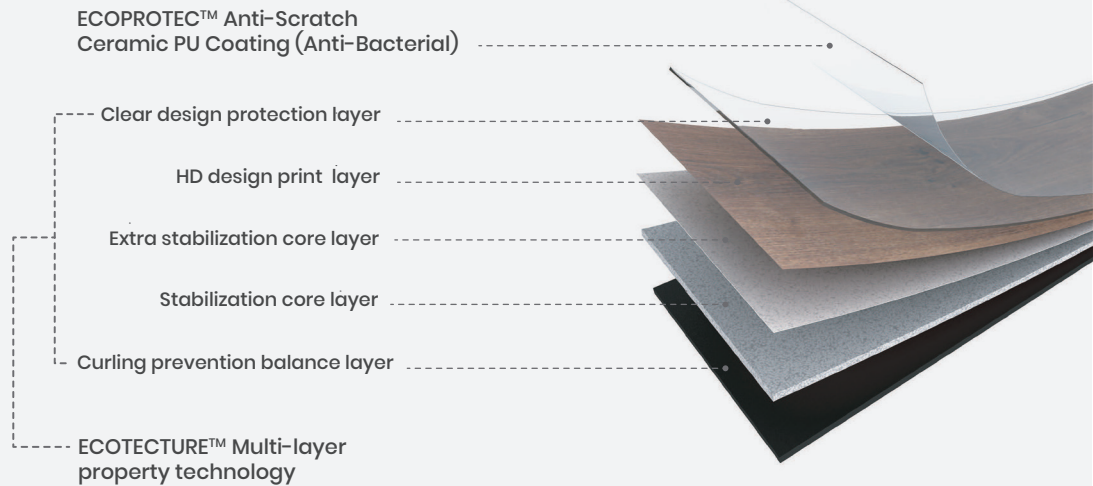

SOLIDE CLICK 55 (OFR)

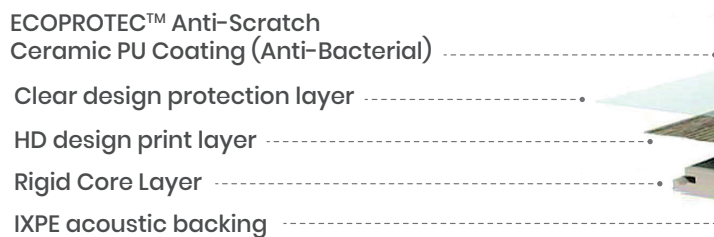



WORKSHOP55 CONCEPT


Bring nature's beauty indoor and transform your workplace, shop, hotel or any room of the house into a place where you feel comfortable!



Walnut Dark Brown

OFR-055-050 | 180 x 1210 mm
OFD-055-050 | 184,1 x 1219,2 mm

EIR

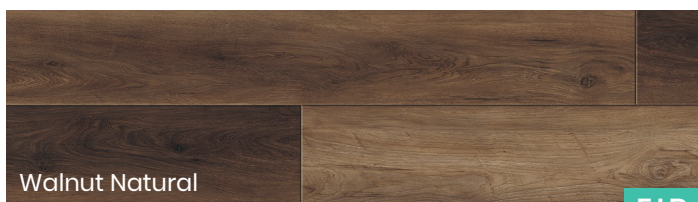

Walnut Natural

OFR-055-051 | 180 x 1210 mm
OFD-055-051 | 184,1 x 1219,2 mm

EIR



CHEVRONS // HERRINGBONES

Raw Oak Light Natural

OFR-055-052 | 180 x 1210 mm
OFD-055-052 | 184,1 x 1219,2 mm
CH OFD-055-152 | 152,4 x 1066,8 mm (angle 45°)
HB OFD-055-252 | 120 x 600 mm

EIR



Flemish Oak Light Natural

OFR-055-053 | 180 x 1210 mm
OFD-055-053 | 184,1 x 1219,2 mm

EIR



Flemish Oak Grey

OFR-055-054 | 180 x 1210 mm
OFD-055-054 | 184,1 x 1219,2 mm

EIR



Old Oak Light Beige

OFR-055-055 | 180 x 1210 mm
OFD-055-055 | 184,1 x 1219,2 mm

EIR



Old Oak Greige

OFR-055-056 | 180 x 1210 mm
OFD-055-056 | 184,1 x 1219,2 mm

EIR



Prestige Oak White

OFR-055-057 | 180 x 1210 mm
OFD-055-057 | 184,1 x 1219,2 mm

EIR



Prestige Oak Light Natural

OFR-055-058 | 180 x 1210 mm
OFD-055-058 | 184,1 x 1219,2 mm

EIR



CHEVRONS // HERRINGBONES

Prestige Oak Light Amber

OFR-055-059 | 180 x 1210 mm
OFD-055-059 | 184,1 x 1219,2 mm
CH OFD-055-159 | 152,4 x 1066,8 mm (angle 45°)
HB OFD-055-259 | 120 x 600 mm


EIR



English Oak Greige

OFR-055-060 | 180 x 1210 mm
OFD-055-060 | 184,1 x 1219,2 mm

EIR

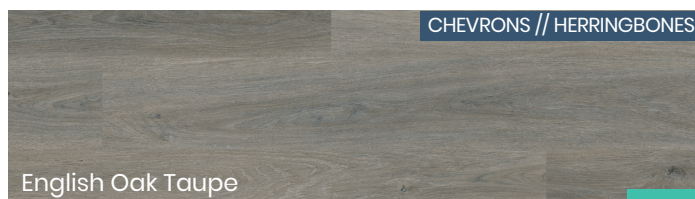

English Oak Taupe

OFR-055-061 | 180 x 1210 mm
OFD-055-061 | 184,1 x 1219,2 mm
CH OFD-055-161 | 152,4 x 1066,8 mm (angle 45°)
HB OFD-055-261 | 120 x 600 mm

EIR



English Oak Natural

OFR-055-062 | 180 x 1210 mm
OFD-055-062 | 184,1 x 1219,2 mm

EIR



English Oak Warm Natural

OFR-055-063 | 180 x 1210 mm
OFD-055-063 | 184,1 x 1219,2 mm

EIR



English Oak Honey

OFR-055-064 | 180 x 1210 mm
OFD-055-064 | 184,1 x 1219,2 mm

EIR



Cerused Oak Dark Natural

OFR-055-065 | 180 x 1210 mm
OFD-055-065 | 184,1 x 1219,2 mm
CH OFD-055-165 | 152,4 x 1066,8 mm (angle 45°)
HB OFD-055-265 | 120 x 600 mm


EIR



Cerused Oak Light Natural

OFR-055-066 | 180 x 1210 mm
OFD-055-066 | 184,1 x 1219,2 mm

EIR

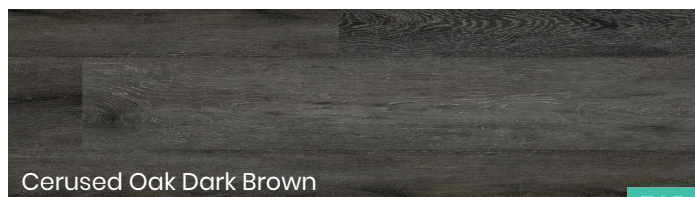

Cerused Oak Dark Brown

OFR-055-067 | 180 x 1210 mm
OFD-055-067 | 184,1 x 1219,2 mm

EIR



Smoked Pine Brown

OFR-055-068 | 180 x 1210 mm
OFD-055-068 | 184,1 x 1219,2 mm

EIR




Smoked Pine Black

OFR-055-069 | 180 x 1210 mm
OFD-055-069 | 184,1 x 1219,2 mm
CH OFD-055-169 | 152,4 x 1066,8 mm (angle 45°)
HB OFD-055-269 | 120 x 600 mm

EIR



HERRINGBONES PATTERN

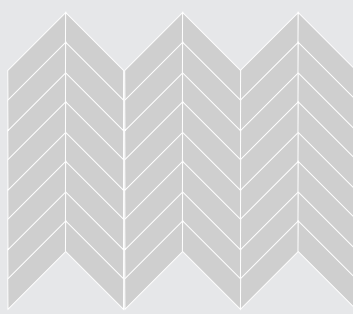

CHEVRONS PATTERN

HERRINGBONES & CHEVRONS

The aesthetics and timeless elegance of herringbones and chevrons floors is unique.

Herringbones & Chevrons patterns tell the story of castles, classical mansion houses and museums. They can also play a magnificent role in modern and classic homes.

REFERENCES :


OFR - SOLIDE CLICK 55
OFD - ECO55

CH Chevrons
HB Herringbones




Cement Natural

OFR-055-070 | 470 x 925 mm
OFD-055-070 | 457,2 x 914,4mm

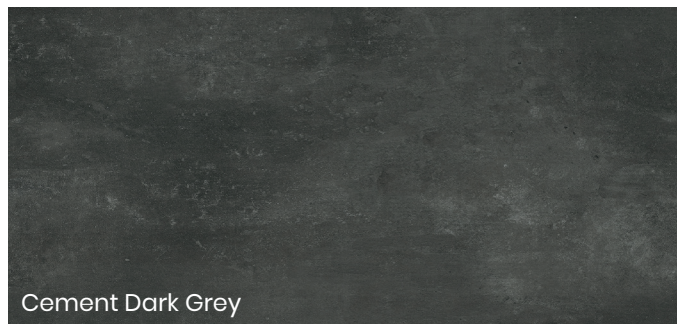

Cement Dark Grey

OFR-055-071 | 470 x 925 mm
OFD-055-071 | 457,2 x 914,4mm

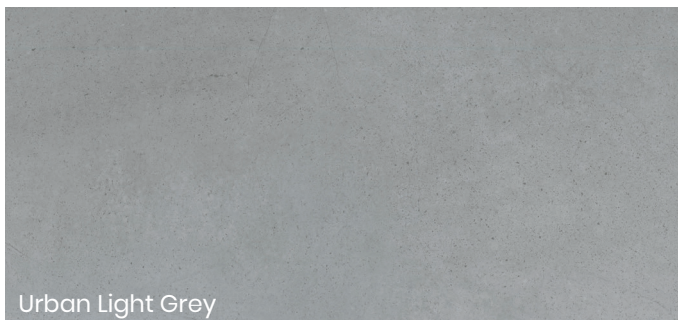


Urban Light Grey

OFR-055-072 | 470 x 925 mm
OFD-055-072 | 457,2 x 914,4mm



Urban Beige

OFR-055-073 | 470 x 925 mm
OFD-055-073 | 457,2 x 914,4mm

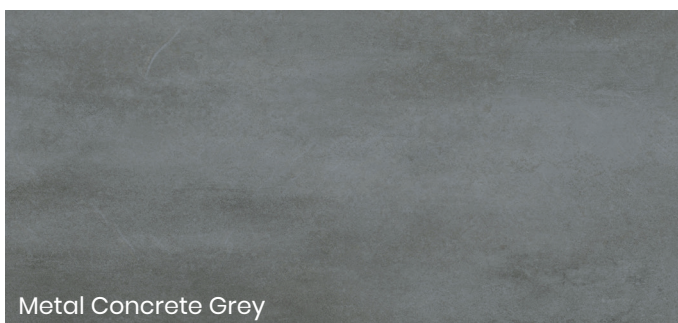

Metal Concrete Grey

OFR-055-074 | 470 x 925 mm
OFD-055-074 | 457,2 x 914,4mm



Metal Concrete Brown

OFR-055-075 | 470 x 925 mm
OFD-055-075 | 457,2 x 914,4mm



Oxyde Bronze Red

OFR-055-076 | 470 x 925 mm
OFD-055-076 | 457,2 x 914,4mm



Oxyde Silver Black

OFR-055-077 | 470 x 925 mm
OFD-055-077 | 457,2 x 914,4mm



Oxyde Light Grey

OFR-055-078 | 470 x 925 mm
OFD-055-078 | 457,2 x 914,4mm



Oxyde Brown

OFR-055-079 | 470 x 925 mm
OFD-055-079 | 457,2 x 914,4mm

PRODUCT SPECIFICATIONS	STANDARD	SOLIDE CLICK 55	ECO 55 // ECO 55 CH // ECO 55 HB		
Product standard	-	EN ISO 10582	EN ISO 10582		
Product standard	-	Heterogeneous resilient floorcovering	Heterogeneous resilient floorcovering		
Total thickness	EN ISO 24346	6,0 mm	2,5 mm		
Wear layer thickness	EN ISO 24340	0,55 mm	0,55 mm		
Classification	EN ISO 10874	Domestic: 23 / Commercial: 33 / Industrial: 42	Domestic: 23 / Commercial: 33 / Industrial: 42		
Total weight	EN ISO 23997	10.000 g/m²	4.750 g/m²		
Wear layer binder content	EN ISO 10582	Type I	Type I		
Abrasion group	EN 660-2	Group T: ≤ 2,00 mm³	Group T: ≤ 2,00 mm³		
Dimensions	EN ISO 24342	Planks: 180 x 1210 mm 10 planks/box = 2,18m² 40 boxes/pallet = 87,20m²	Planks: 184,1 x 1219,2 mm 20 planks/box = 4,49m² 40 boxes/pallet = 179,60m²	Planks (CH): 152,4 x 1066,8 mm 16 planks/box = 2,60m² 66 boxes/pallet = 171,60m²	Planks (HB): 120 x 600 mm 32 planks/box = 2,30m² 80 boxes/pallet = 184m²
		Tiles: 470 x 925 mm 5 tiles/box = 2,17m² 40 boxes/pallet = 86,80m²	Tiles: 457,2 x 914,4 mm 10 tiles/box = 4,18m² 42 boxes/pallet = 175,56m²	-	-
Surface treatment	-	PUR Ecoprotec™	PUR Ecoprotec™		
Locking system	-	I4F	Dry back		
Bevelled edges	-	Yes	Yes (except Chevrons)		

PRODUCT PERFORMANCES	STANDARD	SOLIDE CLICK 55	ECO 55 // ECO 55 CH // ECO 55 HB		
Dimensional stability	EN ISO 23999	≤ 0,06 %	≤ 0,10 %		
Castor chair	ISO 4918	No damage (Type W)	No damage (Type W)		
Furniture leg	EN ISO 16581	No damage	No damage		
Squareness & straightness	EN ISO 24342	≤ 0,25 mm	≤ 0,25 mm		
Residual indentation	EN ISO 24343-1	≤ 0,10 mm	≤ 0,10 mm		
Impact sound reduction	EN ISO 717-2	ΔLw = 22 dB	ΔLw = 6 dB		
Light fastness	EN ISO 105-B02	≥ 6	≥ 6		
Slip resistance	DIN 51130 EN 13893	R10 DS	R10 DS		
Resistance to chemicals	EN ISO 26987	Not affected (0)	Not affected (0)		
Thermal resistance	EN ISO 10456	0,04 m² K/W	0,02 m² K/W		
Curl after exposure to heat	EN ISO 23999	≤ 2 mm	≤ 2 mm		
Fire resistance	EN 13501-1	Bfl-s1	Bfl-s1		
Electrical properties	EN 1815	≤ 2kV	≤ 2kV		
Resistance against staining	EN 26987	Passed	Passed		
Underfloor heating suitability	EN 12524	Suitable - max. 27°C	Suitable - max. 27°C		

ENVIRONMENT	STANDARD	SOLIDE CLICK 55	ECO 55 // ECO 55 CH // ECO 55 HB		
TVOC after 28 days (AgBB test) - Indoor air quality	ISO 16000-9	≤ 100µg/m³	≤ 100µg/m³		
VOC emission class (French regulation) - Indoor air quality	ISO 16000-9	A+	A+		
Floorscore VOC test - Indoor air quality	ISO 16000-9	Passed	Passed		
Plasticizer	-	Phthalate-free	Phthalate-free		
Formaldehyde group	EN 717-1	E1	E1		
Recyclability	-	100%	100%		

WARRANTIES	STANDARD	SOLIDE CLICK 55	ECO 55 // ECO 55 CH // ECO 55 HB		
Residential warranty	-	25 years	25 years		
Commercial warranty	-	10 years	10 years		

CE MARKING	STANDARD	SOLIDE CLICK 55	ECO 55 // ECO 55 CH // ECO 55 HB		
DoP number	-	No. 21-KS-001	No. 21-SW-001		

ONE
FLOR
EUROPE

WITTESTRAAT 10 - 8501 HEULE - BELGIUM
+32 56 41 06 04 / INFO@ONEFLOR-EUROPE.COM



ONE
FLOR
UK

WWW.ONEFLOR-EUROPE.COM

WWW.ONEFLOR-UK.CO.UK